

Hydraulic Response of Wadi Fatimah Basin, Western Province, Kingdom of Saudi Arabia

الإستجابة الهيدروليكية لحوض وادي فاطمة، المنطقة الغربية -

المملكة العربية السعودية

محمود سعيد اليماني

Faculty of Earth Sciences, Hydrogeology Department,
P.O Box 80206, Jeddah 21589, Saudi Arabia

قسم علوم الأرض - ص.ب. 21589 - جدة 80206

المملكة العربية السعودية

Abstract: A computer-based rainfall-runoff Hydrologic Modeling System (HEC-HMS) was used to determine the approximate hydrologic response of seven major sub-basins that contribute to the main channel of Wadi Fatimah watershed, situated in the western part of Saudi Arabia. The hydraulic response results, which include flood peak discharges, lag time and volumes of flood and sediment load transported by flood waters for different return periods of 10, 25, 50 and 100 years with storm duration of 1 hour are estimated. On the other hand, as an example, the hydraulic response results and resulting flood hydrographs of the seven sub-basins for the storm of 25 year return periods are presented. These results show that the largest flood volume, which is 3.2 million cubic meters would expect to be produced at Ash Shamiyyah sub-basin (SUB2) with flood peak discharge 975m³/s and a lag time of 5.6 hours, while the smallest one (1.98 million cubic meters) with lag time of 2.7 hours and runoff peak 120m³/s was estimated at the outlet of Wadi Azzibarah sub-basin (SUB3). The flood volume of the entire basin was 73.3 million cubic meters with runoff peak at the outlet of about 1550m³/s and lag time of about 12.1 hours. However, the values of flood peak discharge and volumes of floods as well as sediment loads increase for storms of longer return periods. The outcome results of this work may provide valuable information that can help in water work constructions to prevent and/or reduce the flood damages that take place within the study area.

Keywords: Boilers emission, burners configuration, diffusion flames, double-burner, equivalence ratio, fumes incineration, premixed flames.

المستخلص: لإستخدام برنامج (HEC-HMS) والمعتمد في الأساس على العلاقة بين المطر - السيل لتمذجة النظام الهيدرولوجي بحوض وادي فاطمة والواقع في الجزء الغربي من المملكة العربية السعودية وذلك لتحديد الاستجابة الهيدروليكية التقريبية لافرع السبع الرئيسية والتي تساهم بمياهها السطحية للمجرى الرئيسي. تم حساب واستخلاص نتائج الاستجابة الهيدروليكية والمضمنة قمة تصريف السيول وزمن الارتفاع لقمة السيل وحجوم السيول والحمولة التي نقلت بفعل مياه السيول بمواصف ممطرة ذات مدد تكرار مختلفة (10, 25, 50, 100 سنة) لعاصفة مدتها ساعة واحدة. من ناحية أخرى تم طرح وكمثال نتائج الاستجابة الهيدروليكية والمنحنيات المائية للسبع الافرع الرئيسية لمدة تكرار 25 سنة، اشارت النتائج ان اكبر حجم لسيل والذي يقدر بحوالي 3.2 مليون م³ يتوقع ان يتولد عند مخرج فرع وادي الشامية مع قمة سيل 975 م³/ث وزمن ارتفاع لقمته مقداره 5.6 ساعة، في حين اشارت ان أصغر سيل حجمه 1.98 مليون م³ مع زمن ارتفاع لقمته حوالي 2.7 ساعة وقمته 120 م³/ث يحدث عند مخرج فرع وادي الزبارة. تم حساب حجم السيل المتولد عند مخرج حوض وادي فاطمة والذي يقدر بحوالي 73.3 مليون م³ وقمته 1550 م³/ث. من جانب آخر لوحظ ان قيم قمة السيول وكذلك حجوم السيول والرواسب المنقولة بواسطتها تزداد بزيادة مدد التكرار المختلفة. ان النتائج التي استخلصت من هذا العمل ربما توفر معلومات قيمة يمكن ان تساعد في الانشاءات ذات العلاقة بمياه السيول وذلك لمنع أو الأقلال من دمار السيول والتي تحدث داخل منطقة الدراسة.

كلمات مدخلية: السيول - مسار السيل - المنحنيات المائية

Introduction

Despite the arid nature of Saudi Arabia, flash floods often take place as a consequence of excessive rainfalls. These floods occasionally cause heavy destruction to human lives and properties. This fact ranks floods among the most catastrophic phenomena in wadis that are located in the Arabian Shield in the western part of the country. Wadi Fatimah is one of these basins where flash floods frequently take place either locally within its

tributaries or within the entire basin. These floods almost become a source of danger that threaten towns such as Bahrah and Hada and other small villages within the wadi as well as highways and bridges that obstruct the water course of these basins. Generally, flood discharges are not properly studied in the country. A small number of investigations concerning flood studies is available (e.g. Sorman and Abdulrazzak, 1987; Al-Turbak and Quraishi, 1987; Nouh, 1988; Sorman, *et al.* 1991; Abdulrazzak, *et al.* 1995). Their work is

mostly related to regional flood frequency estimates for basins, in order to derive the frequency of peak discharges and develop regional curves to determine annual peak flows for given return periods at ungauged sites. Reliable estimates of the expected flood discharges of the sub-basins in Wadi Fatimah are essential for protection measures of areas that are often subjected to flash floods and for future development. The present work focuses on the main tributaries of Wadi Fatimah, including Ash Shamiyyah, Al-Yamaniyyah, Hawarah, Azzibarah, Alaf, Dism, and Thalathan sub-basins. The present work is an attempt to quantify wadi sub-basin characteristics and their hydraulic responses for design rainfall of 10, 25, 50 and 100 year return periods for a storm duration of one hour.

Description of the Study Area

Wadi Fatimah basin lies within the western province of Saudi Arabia between latitudes $21^{\circ} 00'$ and $22^{\circ} 00'$ N and longitudes $39^{\circ} 10'$ and $40^{\circ} 30'$ E (Fig. 1). It has a catchment area of about 3900 km². It drains in a southwesterly direction from the Hijaz highlands (~ 1600 meters above sea level) towards the Red Sea.

The study area lies in a transitional zone that comes under the influence of both Mediterranean and monsoon types modified by the proximity of the Red Sea and the main escarpment. During the late autumn the southeasterly monsoon is channeled

along the Red Sea trough from which it is diurnally diverted towards the land by differential heating, giving rise to orographic thunderstorms along the escarpment. During the winter months air masses of Atlantic Ocean origins pass over the middle and north of Africa across the Red Sea trough, behaving as a cold or warm air mass giving rise to widespread rain over the whole study area (Sen, 1983; Al-Ehaideb, 1985; and Alyamani and Sen, 1992). The lower part of the basin, which lies in the coastal plain, may be considered among the driest parts, where the annual rainfall does not exceed 60mm. In contrast, the upper reaches (1260 meters above sea level) often receive considerable amount of rain and the average annual rainfall is about 280mm.

Geologically, the study area is located on the rifted western margin of the Arabian Shield. It is dominated by the presence of Precambrian igneous and metamorphic rocks. In the upper parts, the basement rocks bordering the wadi form cliff walls of intrusive rocks consisting of granite, diorite and granodiorite (Moore and Al-Rehaili, 1989). These rocks are highly fractured and jointed. Harat Rahat, which is basaltic flow of Tertiary age, bounds the north and northeast corner. The Quaternary deposits that mainly derived from the weathering of the parent rocks are the most extensive of the surficial deposits, consisting of fine to coarse sands, gravels and clay. The drainage system is generally well developed and the pattern is typically dendritic (Fig.1).

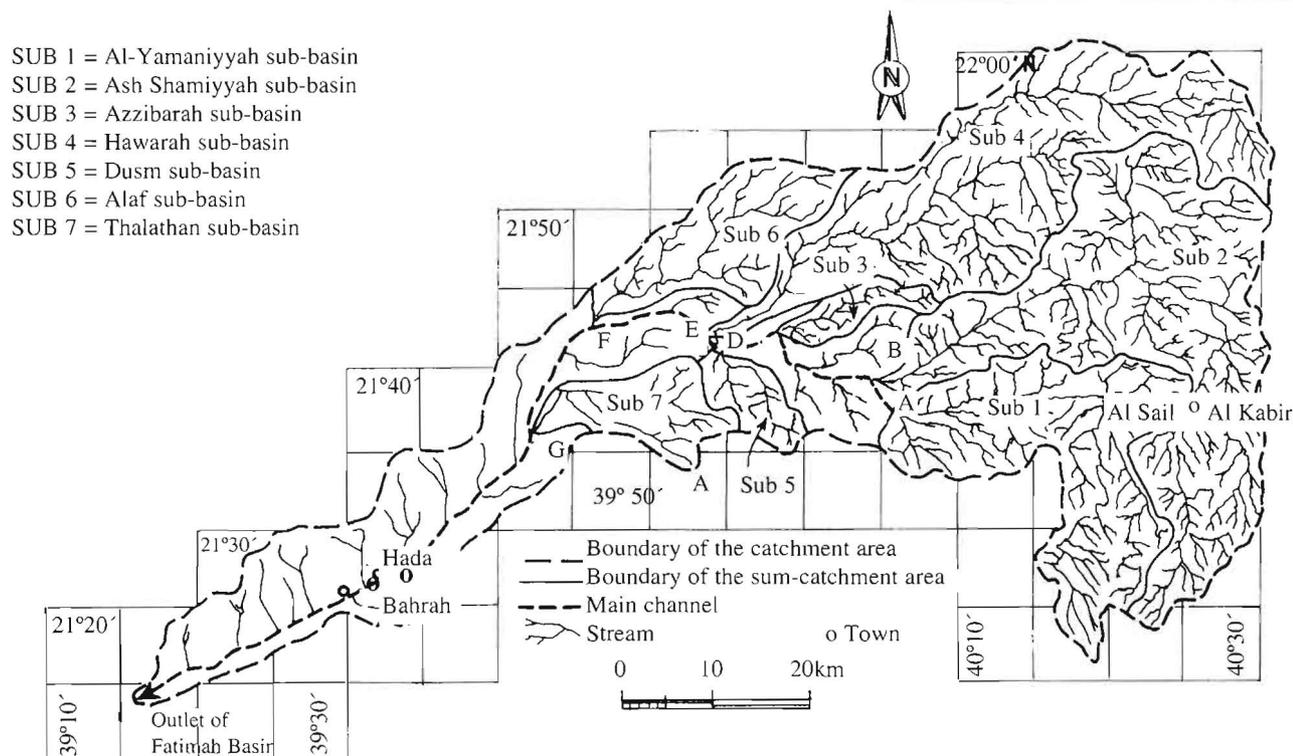


Fig. 1. Location map of the study area.

The detailed pattern of the drainage net and the topography of the wadi may in places reflect differential erodibility. It has many small and relatively large tributaries, which are deep and narrow, and their longitudinal profiles are rather gentle and in some places become irregular. Larger sub-basins such as Ash Shamiyyah and Al-Yamaniyyah are probably controlled by major structures, and smaller faults commonly control lesser drainage channels. However, the major tributaries mostly follow N-S and NE-SW directions, following the dominant faults and joint systems. The upper part of the wadi is rather narrow, where the width of the main wadi course varies from 150m to more than 1.5km further downstream, where the alluvium deposits are widespread and rather thicker.

Methodology and Data Collection

The absence of hydrologic data in the area considered usually results in no guidance on flood characteristics for the design of hydraulic structures. Predicting peak discharges and/or synthesizing complete discharge hydrographs for use in designing minor and major structures are two of the most challenging tasks in hydrology. However, advances in computer methods over the past two decades combined with larger and more extensive data monitoring efforts have allowed for the development and application of simulation models in hydrology. Such models incorporate various equations to describe hydrologic transport processes and various design and control schemes can be tested with the model. For watershed analysis, the major categories of interest include lumped parameter versus distributed parameter, event versus continuous and stochastic versus deterministic. Most of these models are simulating single storm responses for given rainfall input data.

Unity hydrograph or kinematic wave methods are used to generate storm hydrographs, which are then routed within the stream channels. In the present work, the Hydrologic Modeling System (HEC-HMS), (2001) that was introduced by the US Army Corps of Engineers, Hydrologic Engineering Center was used. The basic idea of this model is to simulate the rainfall-runoff processes of dendritic watershed systems. It is also designed to be applicable in a wide range of geographic areas for solving the widest possible range of problems. The physical representation of watersheds or basins is configured in the basin model. Hydrologic parameters are connected in a dendritic network to

simulate runoff processes. Throughout the options that are offered by the model, flood computations are performed using Snyder's synthetic unit hydrograph with rainfall loss rates determined using the Soil Conservation Service (SCS) curve number method. This method defines the unit hydrograph with two basic parameters, standard lag time (t_p) and storage coefficient (C_p). These two parameters have been derived from a gauged basin in the region that has similar topographic and climatic conditions. A dimensionless method that was developed by SCS for constructing synthetic unit hydrographs based on dimensionless hydrographs was used in the present work (SCS, 1972).

It requires only the determination of the time to peak and the peak discharge, for which the discharge is expressed as a ratio of discharge to peak discharge (Q/Q_p) and the time by a ratio of time to lag time (t/t_p). On the other hand, the hydrographs of the sub-basin routing is performed using the Muskingum method, which is an analytical approach to flood routing. This method needs two variables; the weighting factor (X) and the storage time constant for the reach (K).

The Muskingum X has been approximated as 0.2, whereas K equals the approximate reach travel time, using length divided by the average velocity. The required morphological parameters that are used in the model were determined based on topographic maps of scale 1:50,000. More details on the theory of the proposed methods can be found in the available hydrological textbooks (e.g. Chow, *et. al.* 1988; Viessman, *et. al.* 1989). The flood discharge estimation has been designed for the storms of different return periods (10, 25, 50 and 100 years) and a storm duration of one hour.

The daily rainfall records from Alsail Alkabir rain gauge, which lies in the upper part of the basin (see Fig. 1) were selected to design rainfall for 10, 25, 50 and 100 year return periods. The method of frequency analysis used was the log-Pearson Type III probability distribution. This technique was applied to the data of the maximum daily rainfall in every year throughout the records. The maximum daily rainfall in each station was determined. These values were then employed in the model (see Table 2). A flowchart of the processes and flood hydrograph routing is illustrated in Fig. 2. The sediment loads in the wadis during flash floods were estimated as bed load transported by flood water at the main stream of each sub-basin, using the modified Meyer-Peter's formula (Garg, 1987):

$$q_s = 4700 \{ \tau_o [N^1 / N]^{3/2} - \tau_c \}^{3/2} \quad (\text{Kg/m/hr.})$$

where q_s is the rate of sediment transported per unit width per unit time, τ_o is the tractive stress (kg/m^2), τ_c is the critical tractive stress, which is a

function of the mean grain size diameter of the sediment (kg/m^2), N^1 is the Manning's coefficient of rugosity for a plane bed and N is the actual Manning's coefficient of rugosity for a rippled bed.

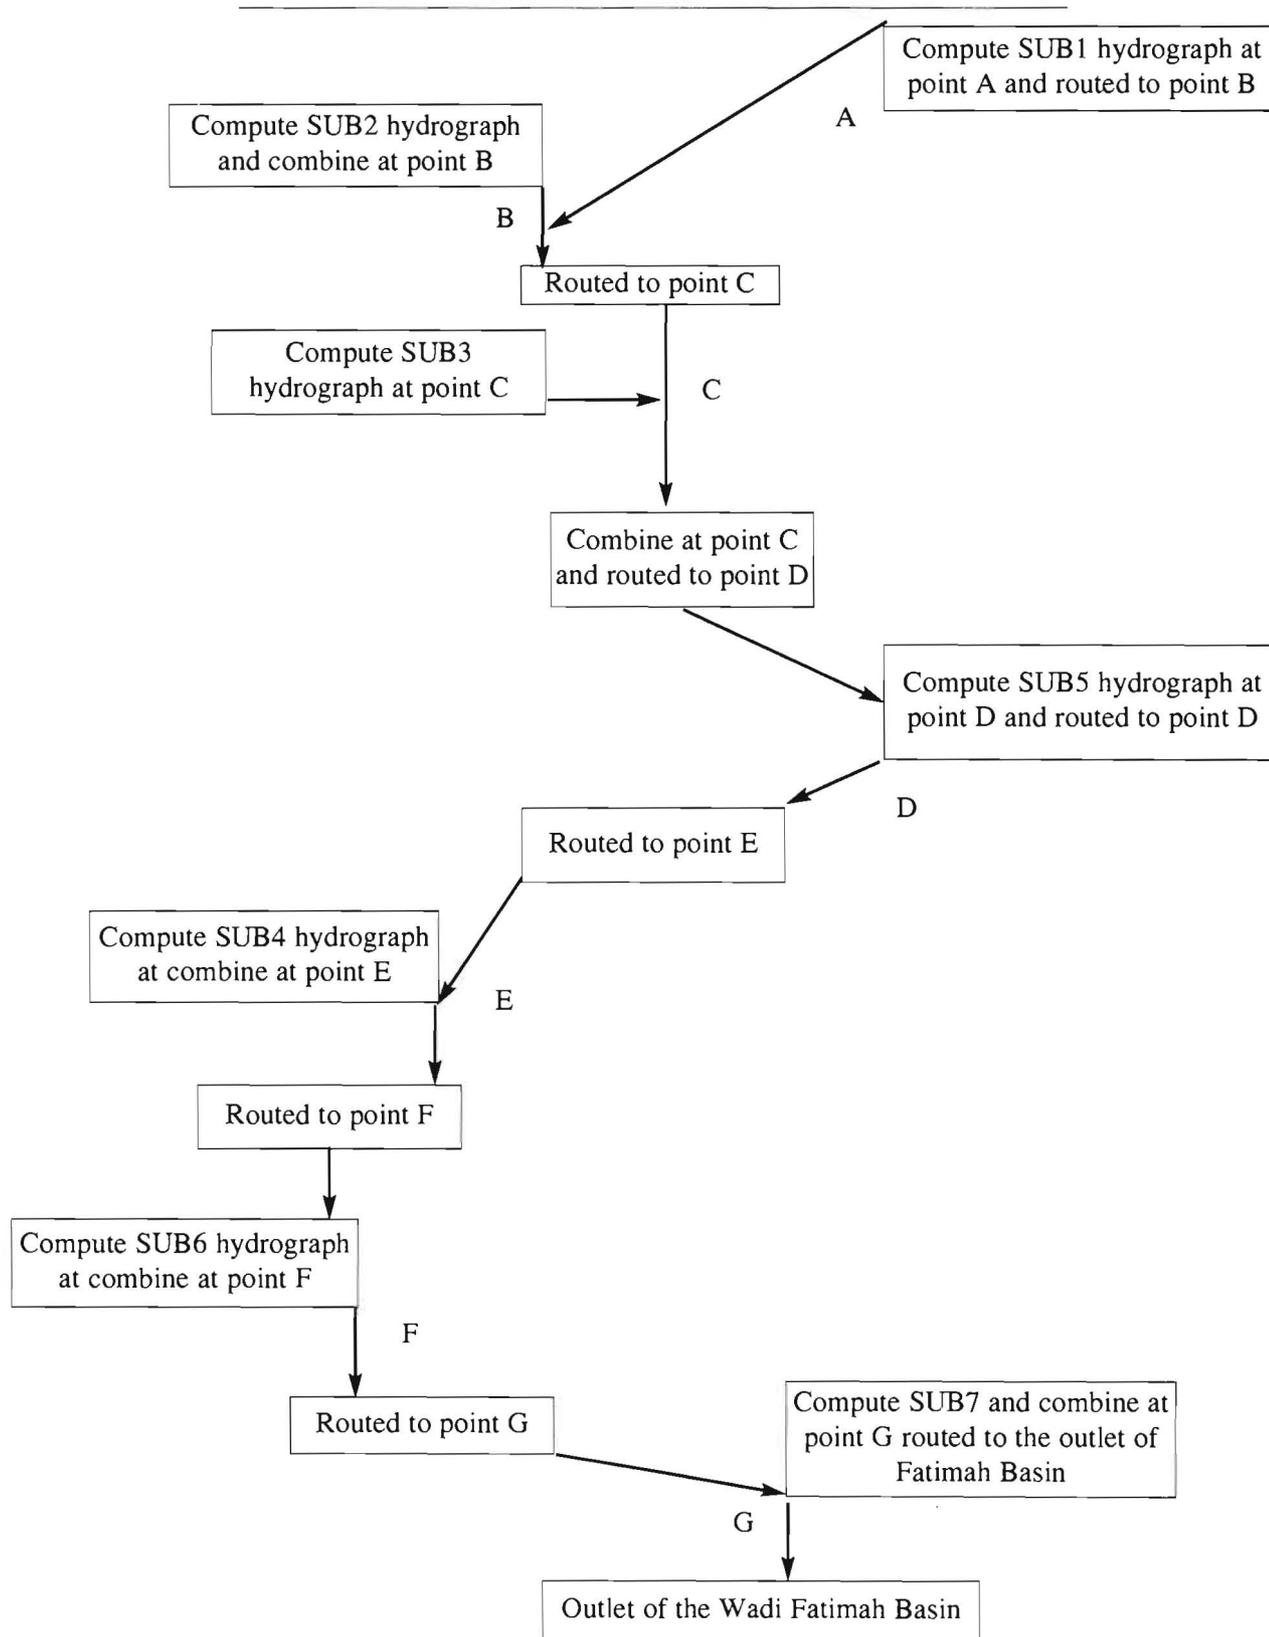


Fig. 2. Flowchart for flood routing computation.

Calibration of the Model

Since no real measurements were available in the study area, data concerning the surface runoff of Wadi Tindaha, which was provided by the Hydrology Division of the Ministry of Water and Electricity, were used for calibration of the model (HMS). Wadi Tindaha, which is a tributary of Wadi Bishah in the southwestern region, drains in a northerly direction from the Asir mountains. It has an area of about 440 Km². The most intense rainfall (55mm) produced a flood with a lag time of 9h and peak discharge 273m³/s. Trial runs were made until the results relatively matched the historical data of the wadi. The comparison results obtained are illustrated in Fig. 3. The percent errors in peak flow and lag time were 7.6% and 4.3% respectively.

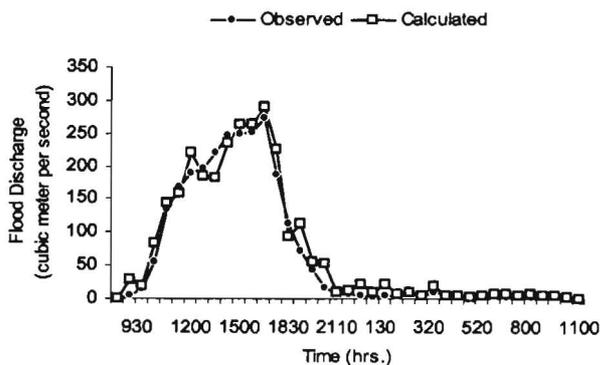


Fig. 3. Comparison between computed and observed hydrographs.

Results and Discussion

This is an approximate analysis because the model was calibrated using data from a wadi out of the study area. A summary of the existing morphometric characteristics of Fatimah watershed and its sub-catchments are presented in Table 1.

Most of the parameters presented in this table were used to estimate the hydraulic responses of the sub-basins of the Wadi Fatimah watershed.

However, these morphometric parameters may control the flood hydrograph estimation in terms of lag time and peak discharges. For instance, the drainage density of the basin and sub-basins reflect the effectiveness of the overland flow. Consequently, the average length of overland flow can be estimated by $1/2D$, where D is the drainage density (Orbson, 1970; Eweida and El Refeai, 1985). High drainage density, such as in Al-Yamaniyyah (SUB1) and Azzibarah (SUB3) sub-basins, reflects a highly dissected basin, which respond rapidly to rainfall input, while low drainage density indicates a poorly drained basin with slow hydrologic responses.

The overall results obtained are presented in Table 2, consisting of the lag time, flood peaks, volumes of floods and sediment loads for each sub-basin as well as their routed and combination flood hydrographs of different return periods, 10, 25, 50 and 100 years.

The results indicate that the storm of 25 year return period, for instance, produced the large flood volume of about 32.5 million cubic meters with rainfall intensity 36mm at Ash Shamiyyah sub-basin (SUB2) with a flood peak of 975m³/s and a lag time of 5.6 hours. In contrast, the lowest flood volume (1.98 million cubic meters) during the same return period with a lag time of 2.7 hours and runoff peak 120m³/s was estimated at the outlet of Wadi Azzibarah sub-basin (SUB3). The difference in the flood peak discharges between the two sub-basins can be attributed to the effects of the drainage basin areas on their runoff peak magnitudes. The same relationship is also depicted between the flood volume and drainage area in Fig 4a-b. In contrast, the sediment load volume does not follow the tendency observed above. It rather shows a weak relationship with the drainage area (Fig. 4c), which might be attributed to the effects of the main channel width (Table 1) of the sub-basins.

Table 1. Results of quantitative analysis of the drainage net of Wadi Fatimah basin and its major tributaries.

| Basin and Sub-Basin name | Drainage Area (km ²) | Drainage Density (km ⁻¹) | Stream Frequency | Average Slope (m/km) | Main Trunk Length (km) | Average Channel Width (m) |
|--------------------------|----------------------------------|--------------------------------------|------------------|----------------------|------------------------|---------------------------|
| Fatimah Basin | 3900 | 0.59 | 0.32 | 7.84 | 144.3 | 250 |
| Ash Shamiyyah Sub-Basin | 903.2 | 0.65 | 0.43 | 11.9 | 82.90 | 155 |
| Alyamaniyyah Sub-Basin | 497.8 | 0.93 | 0.53 | 12.5 | 61.9 | 193 |
| Hawarah Sub-Basin | 736.9 | 0.47 | 0.27 | 10.0 | 87.2 | 171 |
| Dusm Sub-Basin | 67.8 | 0.54 | 0.25 | 15.6 | 14.71 | 90 |
| Alaf Sub-Basin | 216.2 | 0.43 | 0.16 | 19.5 | 38.8 | 143 |
| Thalathan Sub-Basin | 122.9 | 0.50 | 0.16 | 13.7 | 22.0 | 123 |
| Azzibarah Sub-Basin | 55.1 | 0.93 | 0.64 | 16.0 | 21.0 | 109 |

Table 2. Summary of flood peaks and flood and sediment load volumes of different return periods at points A through G to the outlet of Fatimah basin.

| Step | Description | Point | Lag Time (hrs.) | Return period (years) | | | | | | | | | | | |
|--------------------------------|---|---|--------------------------------|---|--|--------------------------------|---|--|--------------------------------|---|--|----------|------|-------|----------|
| | | | | 10 | | | 25 | | | 50 | | | 100 | | |
| | | | | Design rainfall with different return periods in mm | | | | | | | | | | | |
| | | | | 19 | 36 | 54 | 76 | | | | | | | | |
| Flood peak (m ³ /s) | Flood volume (m ³) x10 ⁶ | Volume of sediment Load (Tonnes) x10 ⁶ | Flood peak (m ³ /s) | Flood volume (m ³ /s) | Volume of sediment (Tonnes) x10 ⁶ | Flood peak (m ³ /s) | Flood volume (m ³) x10 ⁶ | Volume of sediment (Tonnes) x10 ⁶ | Flood peak (m ³ /s) | Flood volume (m ³) x10 ⁶ | Volume of sediment (Tonnes) x10 ⁶ | | | | |
| 1 | Computed SUB1 hydrograph at | A | 4.9 | 321 | 9.40 | 0.083575 | 608 | 17.9 | 0.098645 | 913 | 26.9 | 0.109144 | 1285 | 37.8 | 0.118617 |
| 2 | Routed SUB1 hydrograph to | B | 4.1 | 284 | 8.90 | 0.077387 | 538 | 17.4 | 0.090479 | 807 | 26.4 | 0.099159 | 1137 | 37.2 | 0.109397 |
| 3 | Computed SUB2 hydrograph at | B | 5.6 | 515 | 17.2 | 0.063001 | 975 | 32.5 | 0.074212 | 1463 | 48.8 | 0.081409 | 2059 | 68.6 | 0.088825 |
| 4 | Combined (steps 2+3) at | B | - | 781 | 25.1 | 0.140388 | 1480 | 49.9 | 0.164691 | 2221 | 75.2 | 0.180568 | 3126 | 105.8 | 0.198222 |
| 5 | Routed (step 4) to | C | 5.2 | 624 | 23.5 | 0.095376 | 1183 | 48.2 | 0.113524 | 1775 | 73.3 | 0.118900 | 2498 | 103.8 | 0.129897 |
| 6 | Computed SUB3 hydrograph at | C | 2.7 | 64 | 1.05 | 0.022829 | 120 | 1.98 | 0.026893 | 180 | 2.97 | 0.030204 | 254 | 4.20 | 0.032648 |
| 7 | Combined (steps 5+6) at | C | - | 665 | 24.5 | 0.118205 | 1261 | 50.2 | 0.140417 | 1892 | 76.3 | 0.149104 | 2663 | 108.0 | 0.162545 |
| 8 | Routed (step 7) to | D | 2.1 | 646 | 23.6 | 0.108783 | 1224 | 49.1 | 0.127623 | 1837 | 75.1 | 0.141242 | 2585 | 106.8 | 0.155313 |
| 9 | Computed SUB5 hydrograph at | D | 2.4 | 91 | 1.30 | 0.019205 | 172 | 2.45 | 0.022823 | 258 | 3.76 | 0.025092 | 363 | 5.17 | 0.029028 |
| 10 | Combined (steps 8+9) at | D | - | 687 | 24.9 | 0.127988 | 1301 | 51.6 | 0.150446 | 1952 | 78.9 | 0.166334 | 2717 | 111.9 | 0.184341 |
| 11 | Routed (step 10) to | E | 1.1 | 681 | 24.6 | 0.022438 | 1290 | 51.2 | 0.026336 | 1935 | 78.5 | 0.029473 | 2724 | 111.6 | 0.031737 |
| 12 | Computed SUB4 hydrograph at | E | 6.0 | 386 | 14.0 | 0.061626 | 732 | 26.5 | 0.072345 | 1098 | 39.8 | 0.080752 | 1545 | 56.0 | 0.087500 |
| 13 | Combined (steps 11+12) at | E | - | 883 | 38.6 | 0.084064 | 1673 | 77.7 | 0.098681 | 2509 | 118.3 | 0.110225 | 3532 | 167.6 | 0.119237 |
| 14 | Routed (step 13) to | F | 3.2 | 828 | 36.7 | 0.032471 | 1496 | 75.6 | 0.038780 | 2244 | 116.0 | 0.041850 | 3159 | 165.2 | 0.045910 |
| 15 | Computed SUB6 hydrograph at | F | 3.9 | 177 | 4.10 | 0.032309 | 336 | 7.80 | 0.038210 | 504 | 11.70 | 0.042133 | 709 | 16.4 | 0.046182 |
| 16 | Combined (steps 14+15) at | F | - | 901 | 40.8 | 0.064780 | 1707 | 83.4 | 0.076990 | 2561 | 127.2 | 0.083983 | 3604 | 181.6 | 0.092092 |
| 17 | Routed (step 16) to | G | 3.1 | 867 | 37.7 | 0.042715 | 1642 | 79.9 | 0.050440 | 2464 | 123.6 | 0.055627 | 3468 | 177.7 | 0.060378 |
| 18 | Computed SUB7 hydrograph at | G | 2.9 | 135 | 2.34 | 0.028087 | 256 | 4.43 | 0.032987 | 383 | 6.64 | 0.035533 | 539 | 9.35 | 0.039737 |
| 19 | Combined (steps 17+18) at | G | - | 891 | 40.0 | 0.078020 | 1689 | 84.3 | 0.083427 | 2533 | 130.2 | 0.091160 | 3565 | 187.1 | 0.100115 |
| 20 | Routed (step 19) to | Outlet of basin | 12.1 | 818 | 30.1 | 0.027316 | 1550 | 73.3 | 0.032362 | 2325 | 118.2 | 0.036522 | 3272 | 164.3 | 0.040446 |

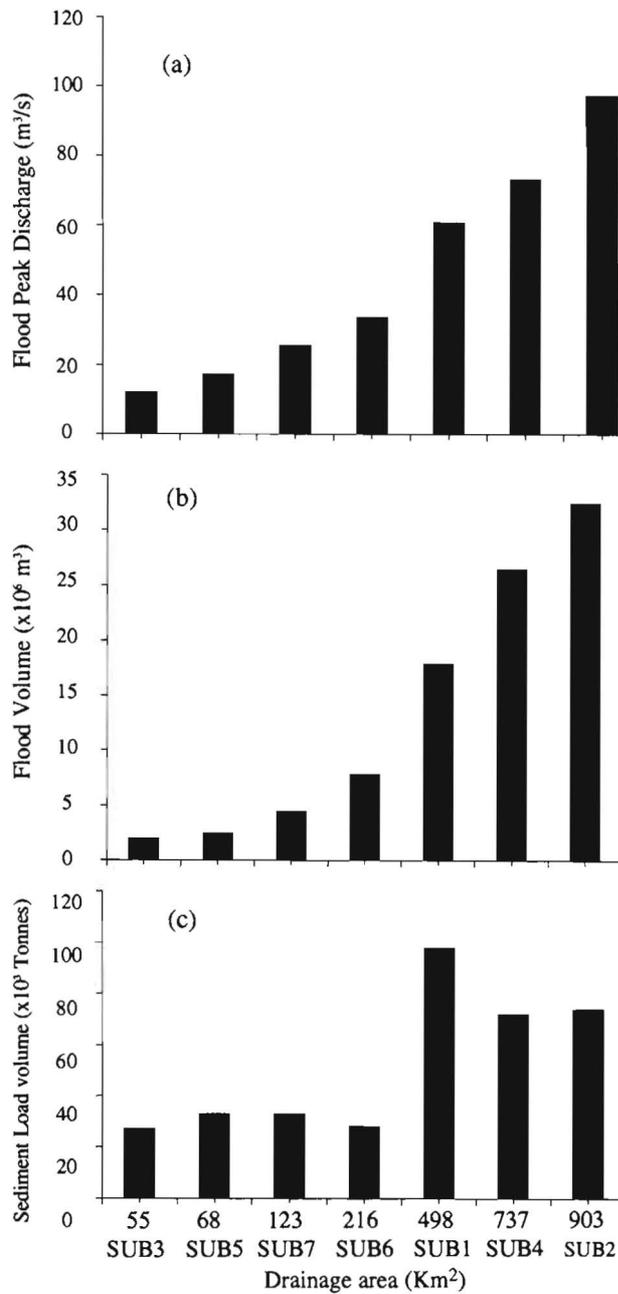


Fig. 4. The relationships of peak discharges, volume of floods and volume of sediment load with drainage area.

The resulting flood peak hydrographs for the storms of the 25 year return period at the outlets of the relatively larger sub-basins (e.g. SUB1, SUB2, SUB4 and SUB6), including their routed and combination hydrographs to the outlet of the entire basin are shown in Figures 5 and 6. The output hydrographs show that the flows are characterized by relatively steep rising limbs and gentle recessions to zero baseflow. This pattern of hydrographs generally represents the flood flows that commonly take place in arid regions (Walters, 1989). The routed and combination hydrographs of the sub-basins at the points A throughout G to the outlet of the basin (see Fig. 2) indicate that the peaks often decrease in their magnitude at the end of the reach lengths and

increase when augmented by tributary inflows. For instance, the flood peak discharge for SUB1 under existing conditions is 608m³/s with a lag time of 4.9 hours, but when it is routed to point B, it reduces to 538m³/s with a lag time of 4.1 hours, as a result of the channel reach storage. On the other hand, the flood peak at the outlet of SUB2 is 975 m³/s and when the routed flood of SUB1 joins, it becomes 1480m³/s. The results also indicate that the flood volume of the entire basin is 73.3 million cubic meters with a flood peak discharge at the outlet of about 1550m³/s and a lag time of 12.1 hours.

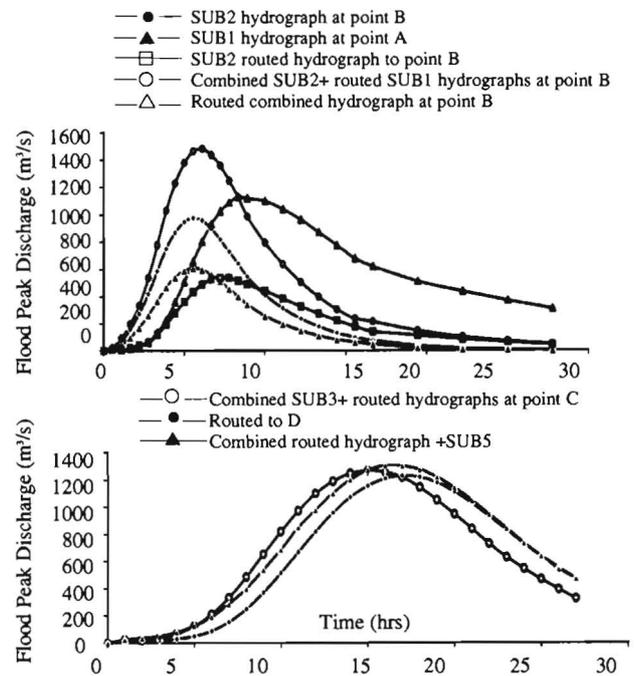


Fig. 5. Runoff hydrographs for SUB1 and SUB2, combined and routed hydrographs.

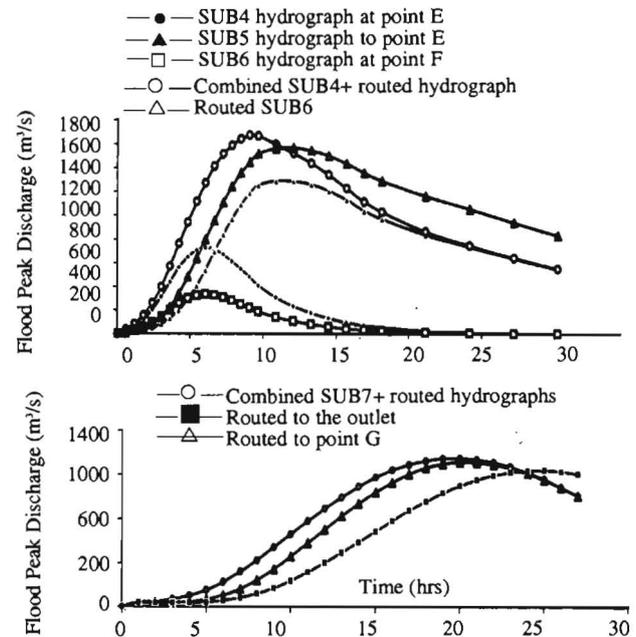


Fig. 6. Runoff hydrographs for SUB4 and SUB6, combined and routed hydrographs.

Conclusions

With the help of a computer-based Hydrologic Modeling System (HEC-HMS), flood peak discharges and the routed and combinations hydrographs were determined for seven major tributaries of the Wadi Fatimah watershed. The study was repeated for storms of 10, 25, 50 and 100 year return periods and storm duration of one hour. The hydraulic response results of the 25 year return period indicate that the largest flood peak discharge of 975m³/s and a lag time of 5.6 hours is expected to take place at the outlet of Ash Shamiyyah sub-basin. The smallest runoff peak of 120m³/s with a lag time of 2.7 hours was estimated at Azzibarah sub-basin outlet. Values of flood peak, sediment load and flood volumes indicate an increasing trend with the storms of longer return periods. The results, such as peak discharges and flood volumes, may provide valuable information in designing flood control works and protection measures.

On the other hand, the sediment load results may provide data that can be used in the design of any proposed dam in the area in terms of dam capacity determination since these sediments that are carried and transported by flood waters often occupy a part of the dam storage capacity.

References

- Abdulrazzak, MJ, Sorman, AU, Onder, H and Al-Sari, A** (1995) Flood estimation and impact: Southwestern region of Saudi Arabia. Final report, No. ARP-10-51, KACST, Riyadh, Saudi Arabia.
- Al-Ehaideb, I** (1985) Precipitation distribution in the southwest of Saudi Arabia. Ph.D. Thesis, Arizona St. Uni. USA.
- Al Turbak, A and Quraishi, AA** (1987) Regional flood frequency analysis for some selected basins in Saudi Arabia. International Symposium on Flood Frequency Risk Analysis, Baton Rouge, Louisiana, USA.
- Alyamani, MS and Sen, Z** (1992) Regional variations of monthly rainfall amounts in the Kingdom of Saudi Arabia. JKAU: FES 6: 113-133.
- Chow, VT, Maidment, DR and Mays, LW** (1988) Applied hydrology. McGraw-Hill Book Company, New York.
- Eweida, EA and El Refeai, AA** (1985) Drainage trends in El Qaa plain and their hydrological significance. 11th Ins. Conf. Statis. Computer Sci. Ain Shams Uni. Cario, Egypt.
- Garg, SK** (1987) Hydrology and water resources engineering. Khanna Publishers, Delhi.
- Moore, TA and Al-Rehaili, MH** (1989) Geologic map of the Makkah quadrangle, Sheet 21D. Kingdom of Saudi Arabia: Saudi Arabian Dir. Gen. Min. Res, Geosciences map GM-107C, 1:250.000 scale.
- Nouh, M** (1988) Estimates of floods in Saudi Arabia. Journal of Eng. Sci. 14(1) King Saud Uni., Riyadh, Saudi Arabia.
- Orbson, JF** (1970) Drainage density in drift covered basins. J. Hydrol. Amer. Soc. Civ. Eng. 96(HY1): 183-192.
- Sen, Z** (1983) Hydrology of Saudi Arabia. Symposium on water resources in Saudi Arabia, King Saud Univ., Riyadh, Saudi Arabia, pp. 68-94.
- Soil Conservation Services (SCS)** (1972) National Engineering Handbook, Section 4, Hydrology. Soil Conservation Services, U.S. Department of Agriculture.
- Sorman, AU and Abdulrazzak, MJ** (1987) Regional flood discharge analysis SW region of Kingdom of Saudi Arabia. Proc. of International Symposium on Flood Frequency Risk Analysis, Baton Rough, Louisiana, USA.
- Sorman, AU, Abdulrazzak, MJ and Onder, H** (1991) Analysis of maximum flood events. International Symposium on Hydrology and Water Resources, Australia.
- US Army Corps of Engineers** (2001) The Hydrologic Modeling System (HEC-HMS). Version 2.1. Davis, CA, USA.
- Viessman, W Jr, Louis, GL and Knapp, JW** (1989) Introduction to hydrology. 3rd Ed. Harper and Rows Publishers, New York.
- Walters, MO** (1989) A unique flood event in an arid zone. Hydrological Processes 3: 15-24.

Received 26th Jan 2004, in revised form 20th March 2004